

# Package ‘DescToolsAddIns’

March 8, 2020

**Type** Package

**Title** Interactive Functions to be Used as Shortcuts in 'RStudio'

**Version** 1.7

**Date** 2020-03-10

**Author** Andri Signorell

**Maintainer** Andri Signorell <andri@signorell.net>

**Description** 'RStudio' as of recently offers the option to define addins and assign shortcuts to them. This package contains addins for a few most frequently used functions in a data scientist's (at least mine) daily work (like `str()`, `example()`, `plot()`, `head()`, `view()`, `Desc()`). Most of these functions will use the current selection in the editor window and send the specific command to the console while instantly executing it. Assigning shortcuts to these addins will save you quite a few keystrokes.

**Depends** base, stats, R (>= 3.5.0)

**Imports** DescTools (>= 0.99.30), rstudioapi (>= 0.1), manipulate, writexl, foreign

**URL** <https://github.com/AndriSignorell/DescToolsAddIns/>

**BugReports** <https://github.com/AndriSignorell/DescToolsAddIns/issues>

**License** GPL (>= 2)

**LazyLoad** yes

**LazyData** yes

**NeedsCompilation** no

**Repository** CRAN

**Date/Publication** 2020-03-08 22:50:02 UTC

## R topics documented:

ColorDlg	2
ColPicker	2
dir.choose	3
FileImportDlg	4

FileOpenDlg . . . . .	5
ModelDlg . . . . .	6
PlotPch . . . . .	7
RStudio AddIns . . . . .	8
SelectVarDlg . . . . .	13
Xplore . . . . .	14

<b>Index</b>	<b>16</b>
--------------	-----------

---

ColorDlg	<i>Display Color Dialog to Choose a Color</i>
----------	---

---

### Description

Choose a color by means of the system's color dialog. Nice for looking up RGB-values of any color.

### Usage

```
ColorDlg()
```

### Value

RGB value of the selected color

### Author(s)

Andri Signorell <andri@signorell.net>

### See Also

[ColPicker](#)

---

ColPicker	<i>Plot All Named R Colors</i>
-----------	--------------------------------

---

### Description

ColPicker() plots the R-colors in a dense manner and allows to collect colors by using a locator. This can be helpful when some colors should be put together to a palette.

### Usage

```
ColPicker(locator = TRUE, ord = c("hsv", "default"), label = c("text", "hex", "dec"),
          mdim = c(38, 12), newwin = FALSE)
```

**Arguments**

locator	logical, defines if the colors can be selected by mouseclick. Default is TRUE.
ord	the order of the colors, can be either defined by hsv-value or by the R internal color-number. Default is the latter.
label	label for the colors, can be the colorname (text), the hex-code (#RRGGBB) or the decimal RGB-number
mdim	the dimension of the color matrix. Default is 38 rows and 12 columns.
newwin	logical, defining if a new graphic device should be used. Default is FALSE.

**Details**

The function plots all the colors but leaves out the grey scales `grey()` and `gray()`.

**Author(s)**

Andri Signorell <andri@signorell.net>

**See Also**

[par](#), [colors](#), [PlotPch](#)

**Examples**

```
ColPicker(locator=FALSE, ord="hsv")
ColPicker(locator=FALSE, label="hex")
```

---

dir.choose	<i>Choose a Folder Interactively</i>
------------	--------------------------------------

---

**Description**

Choose a directory interactively.

**Usage**

```
dir.choose(default = "", caption = "Select directory")
```

**Arguments**

default	which directory to show initially.
caption	the caption on the selection dialog

**Value**

A length-one character vector, character NA if 'Cancel' was selected.

**Author(s)**

Andri Signorell <andri@signorell.net>

**See Also**

[file.choose](#)

**Examples**

```
## Not run:  
  
dir.choose(getwd(), "Choose a suitable folder")  
  
## End(Not run)
```

---

FileImportDlg

*Import File In Foreign Format*

---

**Description**

Import a file in SPSS, Stata, SAS, Minitab or Systat format interactively.

**Usage**

```
FileImportDlg(auto_type = TRUE, env = .GlobalEnv)
```

**Arguments**

auto_type	determines if the type dialog should be displayed. Default is FALSE, so that if the file extensions are ".sav", ".dta" the appropriate dialog will be called directly.
env	environment in which the dataset should be created.

**Details**

The imported file will be assigned to the given variablename.

**Author(s)**

Andri Signorell <andri@signorell.net>

**See Also**

[read.dta\(\)](#), [read.spss\(\)](#), [read.systat\(\)](#), [read.ssd\(\)](#)

**Description**

Handling of pathnames is tedious in Windows because of the backslashes, that prevent simple pasting of a copied path into the source code. `FileOpenDlg()` displays the FileOpen-Dialog for picking a file interactively. When done, backslashes in the returned path will be replaced by simple slashes as used in R path definitions. The edited path is returned.

**Usage**

```
FileOpenDlg(fmt = NULL)
```

**Arguments**

`fmt` the format, in which the filename parts should be returned. This can be defined quite flexible containing the elements path, filename and ext (file extension) enclosed by `%`.  
Default is `path/filename.ext` and coded as `"%path%%filename%.%ext%"`. See examples for additional alternative definitions.

**Details**

There are 2 predefined formats that can be addressed with `fmt = 1` resp. `fmt = 2`. 1 will return the path enclosed by a typical `read.table(...)` command, 2 will do the same with `load(...)`.

**Value**

character string containing the path (also present in the clipboard)

**Author(s)**

Andri Signorell <andri@signorell.net>

**See Also**

[file.choose](#)

**Examples**

```
## Not run:
# choose a file
fn <- FileOpenDlg()
print(gettextf("You chose the file: %s ", fn))

# the path and filename can as well be nested in a command,
# done here to build a read.table command that can be well inserted into the code:
FileOpenDlg(fmt="d.%fname% <- read.table(file = \"%path%\%fname%.%fxt%\",
```

```

header = TRUE, sep = \";\", na.strings = c(\"NA\", \"NULL\"), strip.white = TRUE)”)
# go to your editor and paste...

## End(Not run)

```

---

ModelDlg

*Compose Model Formula*


---

### Description

ModelDlg() allows to compose model formulas based on the variablenames of a data.frame. The available variables can be filtered and sorted, which is helpful to keep the overview. Additional orientation is provided by the comments with which variables can be assigned. (See [Label\(\)](#)). The labels will be displayed below the variable list.

The model dialog can also be used to edit an already existing formula. Simply select the model formula (including the data argument) and start the dialog.

### Usage

```
ModelDlg(x, ...)
```


### Arguments

x	the data frame containing the variables for the model.
...	further arguments to be passed to the default function.

### Details

In the model dialog, the variablenames (extended with their class) of the selected data.frame are listed on the right, from where they can be inserted in the model box by clicking on a button between the two boxes. Clicking on the + button will use + to concatenate the variablenames. The same applies analogously to \* and :.  $x^2$  inserts the chunk `poly(<varname>, 2)`, the grade of the polynomial can easily be changed in the formula edit field afterwards.

Any criteria for the variablename can be entered in the filterbox. The filter will be dynamically applied to the list. In order to get rid of the filter just empty the filterbox.

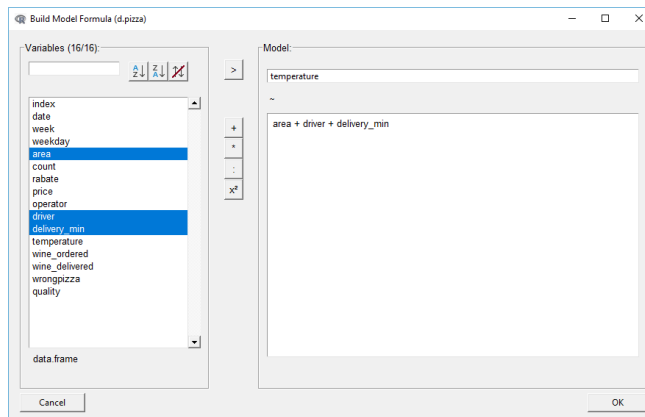

After clicking on ok, the formula `temperature ~ area + driver + delivery_min, data=d.pizza` will be inserted on the cursor position.

An already constructed formula can also be provided to the function. The model dialog will separate the single parts and populate the according textboxes.

### Value

the model formula

### Author(s)

Andri Signorell <[andri@signorell.net](mailto:andri@signorell.net)>

### See Also

[formula](#)

### Examples

```
## Not run:
ModelDlg(d.pizza)

## End(Not run)
```

### Description

The function `PlotPar()` plots the typically used parameters and their values.

**Usage**

```
PlotPar()  
PlotPch(col = NULL, bg = NULL, newwin = FALSE)  
PlotMar()
```

**Arguments**

col	the default plotting color for PlotPch. Defaults to hred.
bg	The color to be used for the background of the plot symbols. Default is hecru.
newwin	logical, defining if a new graphic device should be used. Default is FALSE.

**Details**

PlotPch() will display the plot characters as defined by pch in all plots in a dialog.

PlotMar() plots the margins.

**Author(s)**

Andri Signorell <andri@signorell.net>

**See Also**

[par](#), [colors](#)

**Examples**

```
PlotPar()  
PlotPch()
```

**Description**

A simply great new feature in RStudio is the option to define add-ins and bind shortcuts to them. This package includes add-ins for some of the most frequently used functions in a data scientist's (at least mine) daily work (like `str()`, `example()`, `plot()`, `head()`, `view()`, `Desc()`). Most of these functions use the current selection in RStudios source panel and send the specific command to the console where it is executed immediately. Assigning shortcuts to these add-ins saves you quite a few keystrokes and brings a breeze of GUI-interaction into your life.



**Usage**

```
NewObject()  
FileOpen()  
FileBrowserOpen()  
FileImport()  
FileSaveAs()  
GetExcelRange(env = .GlobalEnv, header = FALSE)  
GetExcelRangeH(env = .GlobalEnv)  
XLView()  
IntView()  
  
Edit()  
FlushToSource()  
Select()  
  
Str()  
Str1()  
Abstract()  
Head()  
Some()  
Summary()  
Desc()  
Example()  
Info()  
Unclass()  
  
Plot()  
PlotD()  
SetArrow()  
InspectPnt()  
  
BuildModel()  
  
Enquote()  
EnquoteS()  
RemoveDuplicates()  
SortAsc()  
SortDesc()  
Shuffle()  
EvalEnquote()  
FlipBackSlash()
```

**Arguments**

env	Environment for GetExcelRange to write the data. GlobalEnv is default.
header	logical determining if the import from XL should use a header or not


## Details

The following add-ins are available:


- **NewObject:**  
starts the good old internal editor and allows to enter values. In dependence of the initial selection in the code panel different objects will be returned. If the selection was `m` the code for a matrix will be created, if the selection is `d` then the code for a `data.frame` will be returned and a `c` will be interpreted as vector. Default is `m`. Note that column names can be defined within the editor, but not rownames (don't ask me why ...).
- **FileOpen:**  
get the path of a file to open and insert in code. (See also: `Select()`)
- **FileBrowserOpen:**  
get a selected path and opens the systems filebrowser with the according directory.
- **FileImport:**  
display the import file dialog for importing SAS, SPSS, Stata, Systat and MiniTab files. (See [FileImportDlg\(\)](#))
- **FileSaveAs:**  
display a file dialog, get the desired path and filename and save the selected object in the given place. Several file types are supported `csv/xlsx` for `data.frames`, `text/binary` for other objects.
- **GetXLRange:**  
run DescTools command [XLGetRange\(\)](#) by taking the current selection as name for the imported data and replace the current selection by the used code.
- **XLView:**  
view selected object in MS-Excel, which makes sense for `data.frames`.
- **IntView:**  
view selected object with internal viewer (here again: only `data.frames`)
- **Edit:**  
run R-command [fix\(\)](#) on the current selection. This is nice for editing data frames interactively.
- **FlushToSource:**  
run `dput` on the current selection and replace the selection with the result.
- **Select:**  
select or pick things interactively. This function as well evaluates the current selection. If the selection corresponds to `pch` a dialog for selecting point characters will be displayed. If it's `col` the [ColPicker\(\)](#) dialog will be displayed. If it's any of `path`, `fn`, `file` the `FileOpen()` dialog will be displayed. In all other case the [SelectVarDlg\(\)](#) on the current selection will be run. This can be used to select variablenames of a `data.frame` by mouse click or the levels of a factor (all depending on the class of the selected object). The variable names will be returned as string, enquoted and separated by a comma.
- **Str, Str1:**  
run DescTools command [Str\(\)](#) on the current selection, `Str1()` shows only the first level ;
- **Abstract:**  
run DescTools command [Abstract\(\)](#) (a less technical description than `str()`, meant for using with `data.frames`) on the current selection

- Head:  
run R-command `head()` on the current selection
- Some:  
run DescTools command `Some()` on the current selection
- Summary:  
run R-command `summary()` on the current selection
- Desc:  
run DescTools command `Desc()` on the current selection
- Example:  
run R-command `example()` on the current selection
- Info:  
print object properties of the currently selected object
- Unclass:  
run R-command `unclass()` on the current selection
- Plot:  
run `plot()` on the current selection
- PlotD:  
run `plot(Desc())` on the current selection
- SetArrow:  
place an arrow in a plot and insert code into source file
- InspectPnt:  
Launch `IdentifyA(..., poly=TRUE)` with the current selection as argument and returns the selected points on the plot.
- BuildModel:  
display dialog for building up a model formula interactively by point and click. (See `ModelDlg()`)
- Enquote, EnquoteS:  
split the selected text in the source panel using line breaks as separators, enquote the sections using either double or single quotation marks, and paste them separated by comma.
- RemoveDuplicates:  
remove all the duplicates (by row) of the selected text.
- SortAsc, SortDesc, Shuffle:  
sorts the selected text by row in ascending, descending, resp. random order.
- EvalEnquote:  
evaluates the selection before enquoting the parts and paste them separated by comma. This can be used to enquote factors.
- FlipBackSlash:  
Handling backslashes in pathnames can be really annoying on Windows. This function replaces all backslashes in the selected text by simple slashes. The option `ReplaceDoubleSlash` controls whether double slashes should be replaced by simple ones.  
It's cool to set this command to the keyboard shortcut: `Ctrl+Shift+/'`

As soon as the package is loaded once, the AddIns will be listed in RStudios AddIns listbox:

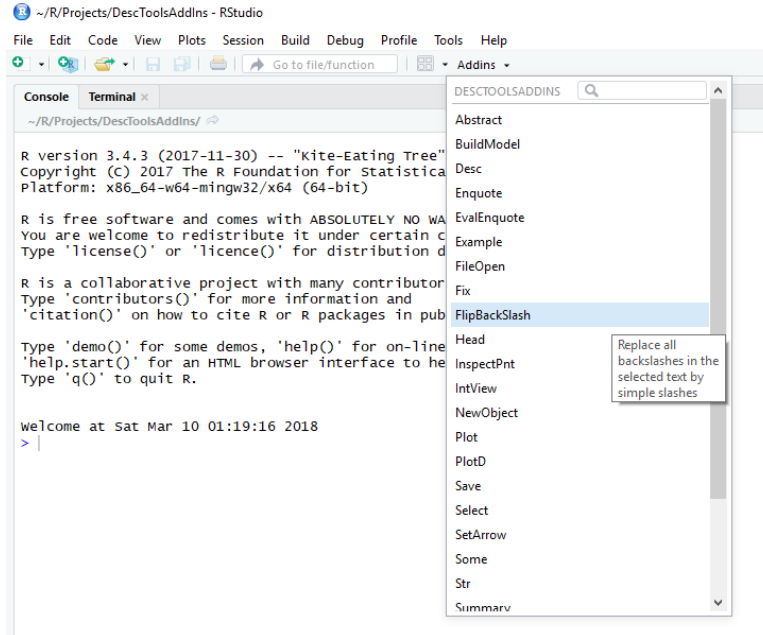

The keyboard shortcuts can then be assigned by clicking on the menu Tools | Modify Keyboard Shortcuts . . . and scroll down to the Addin scope:

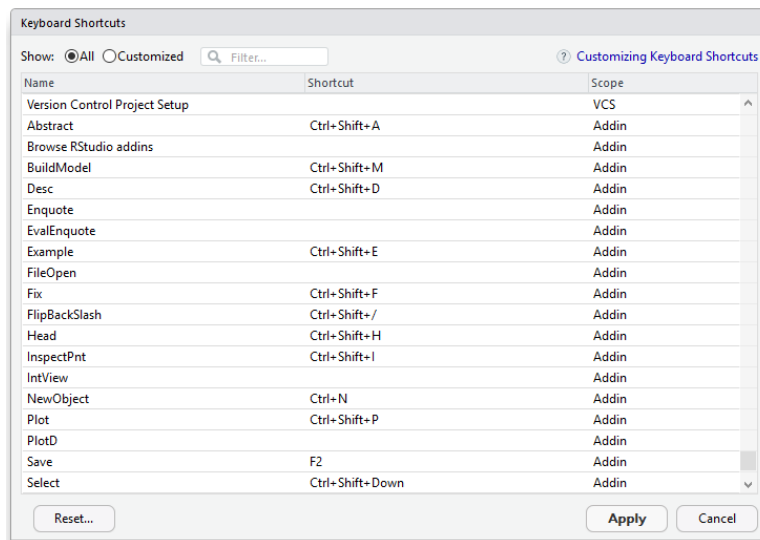

### Author(s)

Andri Signorell <andri@signorell.net>

### Examples

```
if (interactive()){
```

```
    Str()
  }
```

---

SelectVarDlg                      *Select Elements of a Set by Click*

---

## Description

SelectVarDlg() is a GUI utility, which brings up a dialog and lets the user select elements (either variables of a data.frame or levels of a factor) by point and click in a listbox. The list of selected items is written to the clipboard so that the code can afterwards easily be pasted in the source file. This function is best used together with the package DescToolsAddIns, with which the functions can be assigned to a keystroke in RStudio.

## Usage

```
SelectVarDlg(x, ...)

## Default S3 method:
SelectVarDlg(x, useIndex = FALSE, ...)

## S3 method for class 'factor'
SelectVarDlg(x, ...)

## S3 method for class 'data.frame'
SelectVarDlg(x, ...)
```

## Arguments

x	the object containing the elements to be selected. x can be a data.frame, a factor or any other vector.
useIndex	defines, if the enquoted variablenames (default) or the index values should be returned.
...	further arguments to be passed to the default function.

## Details

When working with big data.frames with many variables it is often tedious to build subsets by typing the columnnames. Here is where the function comes in offering a "point and click" approach for selecting the interesting columns. When x is a data.frame the columnnames are listed, when x is a factor the according levels are listed and in all other cases the list is filled with the unique elements of x.

SelectVarDlg() checks for an option "selkey" for defining the selection keywords, defined as a list of this structure:

file	the keywords to be interpreted as a filename, defaults to c("fn", "file", "filename")
dir	the keywords to be interpreted as a directory name, defaults to c("path", "dir")
col	the keywords to be interpreted as a color, defaults to c("col", "color")
pch	the keywords to be interpreted as a point character, defaults to c("pch")

It can be set with

```
options(selkey = list(file=c("fn", "file", "filename"),
                      dir=c("path", "dir", "dirname"),
                      col=c("color", "col"),
                      pch=c("pch")))
)
```

### Value

A comma separated list with the selected values enquoted is returned invisibly as well as written to clipboard for easy inserting the text in an editor afterwards.

### Author(s)

Andri Signorell <andri@signorell.net>

### See Also

[select.list](#)

### Examples

```
## Not run:
SelectVarDlg(x = d.pizza$driver)
SelectVarDlg(x = d.pizza, useIndex=TRUE)

SelectVarDlg(d.pizza$driver)

x <- replicate(10, paste(sample(LETTERS, 5, replace = TRUE), collapse=""))
SelectVarDlg(x)

## End(Not run)
```

---

Xplore

*Interactive Graphical Data Explorer*

---

### Description

Use RStudio's manipulator to explore a data.frame by dynamically creating xy-scatterplots, box-plots and others. Numerical descriptions can as well be produced on the fly.

### Usage

```
Xplore(x)
```

### Arguments

x                    the data.frame to be explored.

**Details**

This function helps to get rid of the afterwards superfluous R-code created while exploring a dataset.

**Author(s)**

Andri Signorell <andri@signorell.net>

**Examples**

```
## Not run:  
Xplore(d.pizza)  
  
## End(Not run)
```

# Index

- \*Topic **file**
  - dir.choose, 3
- \*Topic **hplot**
  - Xplore, 14
- \*Topic **manip**
  - FileImportDlg, 4
  - FileOpenDlg, 5
  - ModelDlg, 6
  - SelectVarDlg, 13
- \*Topic **utilities**
  - ColorDlg, 2
  - ColPicker, 2
  - PlotPch, 7
  - RStudio AddIns, 8
- Abstract, 10
- Abstract (RStudio AddIns), 8
- BuildModel (RStudio AddIns), 8
- Class (RStudio AddIns), 8
- ColorDlg, 2
- colors, 3, 8
- ColPicker, 2, 2, 10
- CreateBookmark (RStudio AddIns), 8
- Desc, 11
- Desc (RStudio AddIns), 8
- dir.choose, 3
- Edit (RStudio AddIns), 8
- Enquote (RStudio AddIns), 8
- EnquoteS (RStudio AddIns), 8
- EvalEnquote (RStudio AddIns), 8
- Example (RStudio AddIns), 8
- file.choose, 4, 5
- FileBrowserOpen (RStudio AddIns), 8
- FileImportDlg, 4, 10
- FileOpen (RStudio AddIns), 8
- FileOpenDlg, 5
- FileSaveAs (RStudio AddIns), 8
- fix, 10
- FlipBackSlash (RStudio AddIns), 8
- FlushToSource (RStudio AddIns), 8
- formula, 7
- GetExcelRange (RStudio AddIns), 8
- GetExcelRangeH (RStudio AddIns), 8
- Head (RStudio AddIns), 8
- head, 11
- Info (RStudio AddIns), 8
- InspectPnt (RStudio AddIns), 8
- IntView (RStudio AddIns), 8
- Label, 6
- ModelDlg, 6, 11
- NewObject (RStudio AddIns), 8
- par, 3, 8
- Plot (RStudio AddIns), 8
- plot, 11
- PlotD (RStudio AddIns), 8
- PlotMar (PlotPch), 7
- PlotPar (PlotPch), 7
- PlotPch, 3, 7
- read.dta, 4
- read.spss, 4
- read.ssd, 4
- read.systat, 4
- RemoveDuplicates (RStudio AddIns), 8
- RStudio AddIns, 8
- Select (RStudio AddIns), 8
- select.list, 14
- SelectVarDlg, 10, 13
- SetArrow (RStudio AddIns), 8



Shuffle (RStudio AddIns), 8  
Some, 11  
Some (RStudio AddIns), 8  
SortAsc (RStudio AddIns), 8  
SortDesc (RStudio AddIns), 8  
Str, 10  
Str (RStudio AddIns), 8  
Str1 (RStudio AddIns), 8  
Summary (RStudio AddIns), 8  
summary, 11

ToWrd (RStudio AddIns), 8  
ToWrdWithBookmark (RStudio AddIns), 8

Unclass (RStudio AddIns), 8  
unclass, 11  
UpdateBookmark (RStudio AddIns), 8

XLGetRange, 10  
XLView (RStudio AddIns), 8  
Xplore, 14