

LGCP with PC priors

Patrick Brown

June 23, 2020

```
library('mapmisc')
library("geostatsp")
data('murder')
data('torontoPop')
```

```
if(requireNamespace("rgdal") & requireNamespace("rgeos")) {
    murderT = spTransform(murder, omerc(murder, angle=-20))
    borderT = spTransform(torontoBorder, projection(murderT))
    borderC = crop(borderT, extent(-12700, 7000, -7500, 3100))
}

## Loading required namespace: rgeos

covList = list(
    pop=torontoPdens,
    inc = log(torontoIncome) )

formulaHere = ~ inc + offset(pop, log=TRUE)
```

LGCP with priors given by quantiles

```
if(requireNamespace("rgdal", quietly=TRUE) & requireNamespace("rgeos", quietly=TRUE) & r
    resG=lgcp(
        formula = formulaHere,
        data=murderT,
        grid=squareRaster(borderC, 30),
        covariates=covList,
        border=borderC, buffer=2000,
        prior = list(
```

```

            sd = c(lower = 0.2, upper = 2),
            range = c(lower = 2, upper=20)*1000),
control.inla=list(strategy='gaussian')
)
} else {
    resG = NULL
}

```

LGCP with penalised complexity prior

$pr(sd > 1) = 0.05$ and $pr(phi < 0.2) = 0.95$

```

if(requireNamespace("rgdal", quietly=TRUE) & requireNamespace("rgeos", quietly=TRUE) & r
    resP=lgcp(formulaHere, data=murderT,
               grid=squareRaster(borderC, 30),
               covariates=covList,
               border=borderC, buffer=2000,
               prior = list(
                   sd = c(u=0.5, alpha=0.05),
                   range = c(u=10*1000, alpha = 0.4)),
               control.inla = list(strategy='gaussian')
)
} else {
    resP = NULL
}

```

LGCP with table priors

```

sdSeq = seq(0,4,len=501)
rangeSeq = seq(0,15*1000, len=501)
if(requireNamespace("rgdal", quietly=TRUE) & requireNamespace("rgeos", quietly=TRUE) & r
    resT=lgcp(formulaHere,
               data=murderT,
               grid=squareRaster(borderC, 30),
               covariates=covList,
               border=borderC, buffer=2000,
               prior = list(
                   sd = cbind(sdSeq, dexp(sdSeq, 2)),
                   range = cbind(rangeSeq, dexp(rangeSeq, 1/5000))),
               control.inla = list(strategy='gaussian'))
)

```

```

        )
} else {
    resT = NULL
}

```

Parameters

```

if(!is.null(resG$parameters))
    knitr::kable(resG$parameters$summary[,c(1,3,5)], digits=3)

```

	mean	0.025quant	0.975quant
(Intercept)	-9.188	-14.504	-3.916
inc	-0.712	-1.200	-0.222
range/1000	1.672	1.188	2.340
sd	0.849	0.730	0.990

```

if(!is.null(resP$parameters))
    knitr::kable(resP$parameters$summary[,c(1,3,5)], digits=3)

```

	mean	0.025quant	0.975quant
(Intercept)	-9.248	-14.532	-4.009
inc	-0.706	-1.191	-0.219
range/1000	1.707	1.209	2.391
sd	0.842	0.722	0.986

```

if(!is.null(resT$parameters))
    knitr::kable(resT$parameters$summary[,c(1,3,5)], digits=3)

```

	mean	0.025quant	0.975quant
(Intercept)	-8.266	-13.507	-3.103
inc	-0.796	-1.274	-0.312
range/1000	1.227	0.794	1.773
sd	0.834	0.722	0.962

Maps

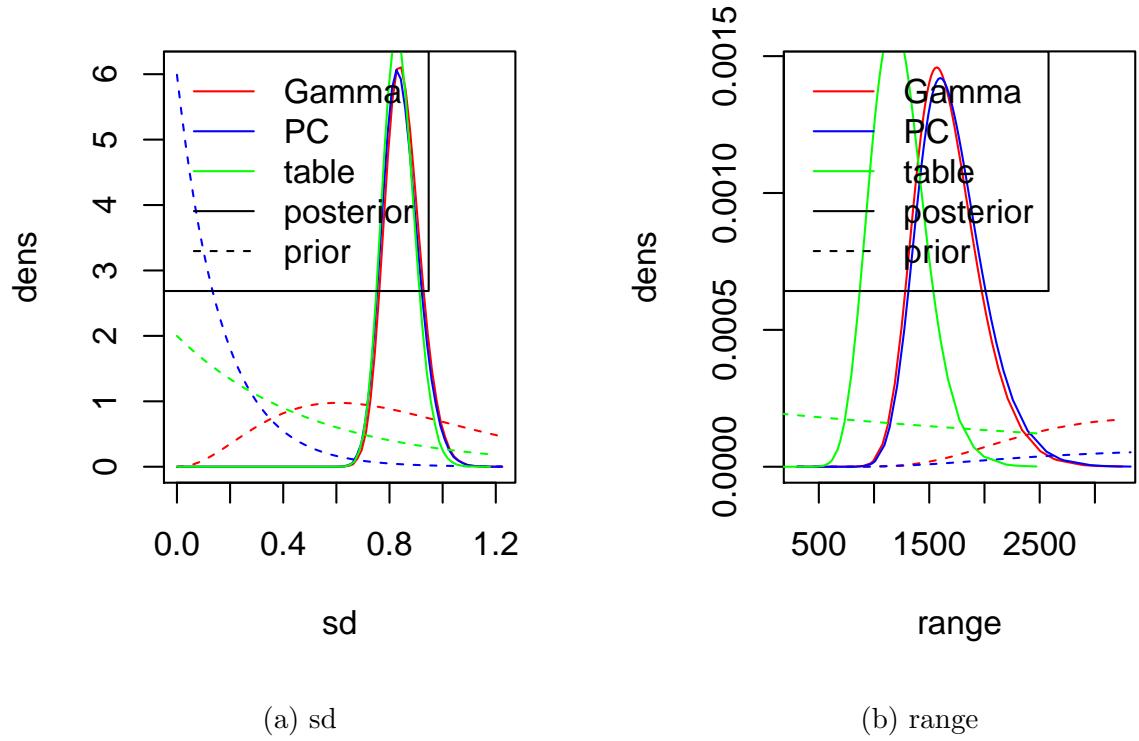


Figure 1: Priors and posteriors

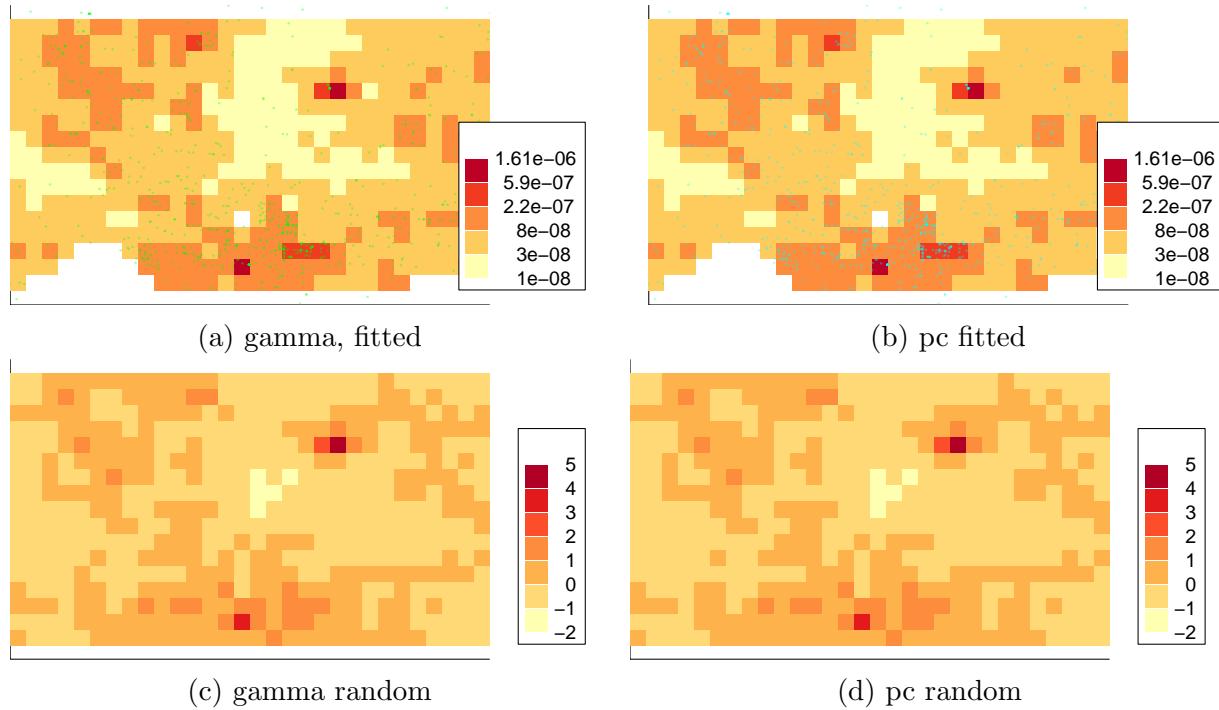


Figure 2: Random effects and fitted values